

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 767 185 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**01.09.1999 Bulletin 1999/35**

(51) Int Cl.<sup>6</sup>: **C08F 212/06**, C08F 218/04,  
C08F 220/12, C08F 220/28,  
C08F 220/44, C08F 220/56,  
C08F 246/00, C08G 18/62

(21) Application number: **95921976.7**

(22) Date of filing: **16.06.1995**

(86) International application number:  
**PCT/JP95/01202**

(87) International publication number:  
**WO 95/35334 (28.12.1995 Gazette 1995/55)**

(54) **ACRYLATE COPOLYMER AND POLYMER COMPOSITION CONTAINING THE SAME**  
**ACRYLATCOPOLYMER UND SOLCHES ENTHALTENDE POLYMERZUSAMMENSETZUNG**  
**COPOLYMERE D'ACRYLATE ET COMPOSITION POLYMERE LE CONTENANT**

(84) Designated Contracting States:  
**DE FR GB IT**

(30) Priority: **22.06.1994 JP 14024494**

(43) Date of publication of application:  
**09.04.1997 Bulletin 1997/15**

(73) Proprietor: **MITSUBISHI CHEMICAL INDUSTRIES  
LIMITED**  
**Tokyo 100 (JP)**

(72) Inventors:  
• **TANIGUCHI, Yasuyuki**  
**Mitsubishi Chemical Corp.**  
**Yokohama Kanagawa 227 (JP)**

• **SOEJIMA, Yuji Mitsubishi Chemical Corporation**  
**Yokohama Kanagawa 227 (JP)**

(74) Representative:  
**Hansen, Bernd, Dr. Dipl.-Chem. et al**  
**Hoffmann Eitle,**  
**Patent- und Rechtsanwälte,**  
**Arabellastrasse 4**  
**81925 München (DE)**

(56) References cited:  
**JP-A- 60 067 516** **JP-A- 61 060 763**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 767 185 B1**

## Description

[0001] The present invention relates to an acrylic copolymer. More specifically, it relates to an acrylic copolymer and a polymer composition thereof having a long pot life, and excellent abrasion resistance, chemical resistance, flexibility and the like, when applied to a paint.

[0002] Acrylic copolymers have been widely used for paints, inks, adhesives, and synthesized leathers and the like due to their excellent weather resistance, flexibility, strength and adhesive properties. Particularly, when used as a paint, various acrylic copolymers with different compositions suited for diverse requirements have been prepared and used for coating various materials used in the field of automobiles, electric home appliances, building materials and the like. In order to improve the abrasion resistance, chemical resistance and weather resistance of acrylic copolymers, it is conventionally known to blend an acrylic copolymer containing a hydroxyl group which is obtained by copolymerization of an acrylic monomer and a monomer containing a hydroxyl group with a crosslinking agent which is selected from the group consisting of a polyisocyanate compound, amino resin, epoxy compound, silane compound and metal chelate and then carrying out a crosslinking reaction (Shinzo Yamashita, Tosuke Kaneko, "Crosslinking Agents Handbook" Published by Taiseisha (1981)). In this case, as a monomer containing a hydroxyl group, hydroxyalkylene acrylate such as 2-hydroxyethyl acrylate (HEA), 2-hydroxyethyl methacrylate (HEMA), 2-hydroxypropyl acrylate (HPA) and 2-hydroxypropyl methacrylate (HPMA) is used. However, in the case of HPA and HPMA, the reactivity of the hydroxyl group bonded to a secondary carbon is low and in the case of HEA and HEMA, the hydroxyl group is bonded to a primary carbon, but the position is near to the main chain and has low degree of freedom. Thus it is difficult for the reaction to proceed rapidly after the crosslinking reaction proceeds. Accordingly, none of them can provide an ideally crosslinked product under normal conditions.

[0003] Therefore, in order to raise the reactivity of the hydroxyl group to be introduced to the acrylic copolymer, use of 4-hydroxybutyl acrylate (4HBA), 4-hydroxybutyl methacrylate (4HBMA) and a (meth)acrylate of polytetramethylene glycol, and the addition products of caprolactone to HEA, HEMA and the like have been proposed in some methods (Japanese Patent Publication No.3-7433, Japanese Patent LAid-open No.61-43623, and Japanese Patent Laid-open No.2-305873). However, these substances also cause such problems as insufficient hardness due to the flexibility of the side chain, decreased strength due to over large interbridge molecular weight, and greatly deteriorated weather resistance due to the polyester structure, and have not yet fulfilled the performances required.


[0004] An object of the present invention is to provide an acrylic copolymer having excellent abrasion resistance, and chemical resistance, at the same time having excellent flexibility, and long pot life, which can be most suitably used as a paint.

[0005] Another object of the present invention is to provide an acrylic copolymer composition which can be used not only for paint, but also for ink binders, coating materials for woven or non-woven fabrics, adhesives, sealers, potting compounds and the like.

[0006] Still another object of the present invention is to provide a paint which can provide a crosslinked coat having excellent strength, abrasion resistance, chemical resistance, heat resistance, weather resistance, hydrolysis resistance, flexibility and the like.

[0007] As a result of intensive study carried out in order to solve the above-mentioned problems, the present inventors found out that the above-mentioned objectives can be accomplished with an acrylic copolymer comprising an acrylic monomer having a specific structure and another ethylenic unsaturated monomer, and completed the present invention.

[0008] Accordingly, a first aspect of the present invention is an acrylic copolymer having a number average molecular weight of 1000 - 500,000, which comprises 1 - 90 % by weight of a structural unit represented by the following general formula (I):

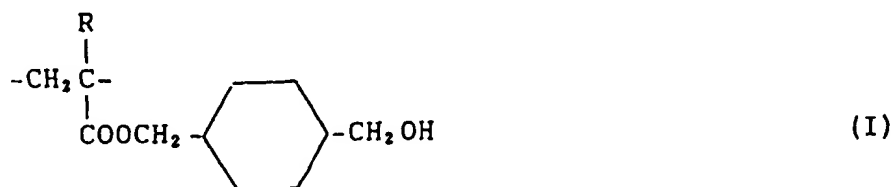


(wherein R represents a hydrogen atom or a methyl group) and 99 - 10 % by weight of a structural unit derived from an ethylenic unsaturated monomer, wherein the acrylic copolymer has a hydroxy number in the range of from 2 to 250 KOH mg/g, measured according to JIS K 1557.


[0009] A second aspect of the present invention is an acrylic copolymer composition in which an acrylic copolymer (A) which is an essential component and has a number average molecular weight of 1000 - 500,000, and comprises

1 - 90% % by weight of a structural unit represented by the following general formula

(I) :

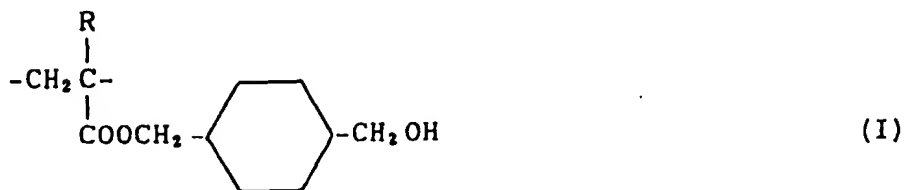

(wherein R represents a hydrogen atom or a methyl group) and 99 - 10 % by weight of a structural unit derived from an ethylenic unsaturated monomer, is blended with a crosslinking agent (B) which is selected from the group consisting of polyisocyanate compounds, amino resins, epoxy resins, silane compounds and metal chelates, wherein the acrylic copolymer has a hydroxy number in the range of from 2 to 250 KOH mg/g, measured according to JIS K 1557. A third aspect of the present invention is a paint composition in which an acrylic copolymer (A) which is an essential component and has a number average molecular weight of 1000 - 500,000, and comprises 1 - 90 % by weight of a structural unit represented by the following general formula (I):

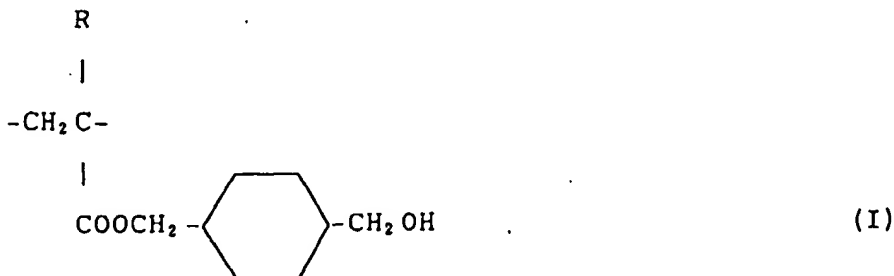

(wherein R represents a hydrogen atom or a methyl group) and 99 - 10 % by weight of a structural unit derived from an ethylenic unsaturated monomer, is blended with a crosslinking agent (B) which is selected from the group consisting of polyisocyanate compounds, amino resins, epoxy resins, silane compounds and metal chelates, wherein the acrylic copolymer has a hydroxy number in the range of from 2 to 250 KOH mg/g, measured according to JIS K 1557.

**[0010]** The acrylic copolymer according to the present invention contains a structural unit represented by the above-mentioned general formula (I) in an amount of 1 - 90 % by weight, and a structural unit derived from the other ethylenic unsaturated monomer in an amount of 99 - 10 % by weight.

**[0011]** In order to introduce the structural unit represented by the above-mentioned general formula (I) into the acrylic copolymer, the following monomer, i.e. 1,4-cyclohexane dimethanol monoacrylate or 1,4-cyclohexane dimethanol monomethacrylate is allowed to exist when the copolymer is produced and these monomers are copolymerized with copolymerizable ethylenic unsaturated monomers. By the use of these monomers, the hydroxyl group introduced into the main chain shows high reactivity since it is bonded to a primary carbon, and since it is positioned appropriately apart from the main chain, it has flexibility and the reactivity is not drastically lowered even after the crosslinking reaction proceeds. Accordingly, an ideally crosslinked product can be obtained under mild conditions. In addition to that, the bulky cyclohexane ring present in the structural unit of formula (I) improves the toughness of the coat and imparts excellent abrasion resistance and chemical resistance to the coat, and tempers excess flexibility to prolong the pot life advantageously.

**[0012]** The ratio of the structural unit represented by the above-mentioned general formula (I) contained in the acrylic copolymer of the present invention is 1 - 90 % by weight, preferably 2 - 80 % by weight, more preferably 8 - 70 % by weight. When the ratio of the structural unit contained is below 1 % by weight, the above-mentioned effects of the present invention cannot be fully achieved, however, the ratio exceeding 90 % by weight is also undesirable as it results in too high viscosity of the obtained copolymer to decrease the solubility in an organic solvent, and provides a problem in production of products such as paints.

**[0013]** A copolymerizable ethylenic unsaturated monomer for providing the acrylic copolymer according to the present invention can be any monomer as far as it can be copolymerized with 1,4-cyclohexane dimethanol monoac-

ylate or 1,4-cyclohexane dimethanol monoacrylate (a), and an ordinary unsaturated monomer which can be subjected to radical polymerization can be used.

[0014] Examples of such unsaturated monomers include hard monomers (b) selected from the group consisting of methyl methacrylate, styrene, methyl styrene, p-vinyl toluene, acrylonitrile and acrylamide, and soft monomers (c) selected from the group consisting of alkyl acrylate (the number of carbon atoms in the alkyl is 1 - 21), alkyl methacrylate (the number of carbon atoms in the alkyl is 2 - 21), vinyl acetate and vinyl propionate.

[0015] Examples of the above-mentioned alkyl acrylate (the number of carbon atoms in the alkyl is 1 - 21) or alkyl methacrylate (the number of carbon atoms in the alkyl is 2 - 21) include methyl acrylate, ethyl (meth)acrylate, propyl (meth)acrylate, n-butyl (meth)acrylate, isobutyl (meth)acrylate, t-butyl (meth)acrylate, 2-ethylhexyl (meth)acrylate, cyclohexyl (meth)acrylate, n-octyl (meth)acrylate, lauryl (meth)acrylate, tridecyl (meth)acrylate, and stearyl (meth)acrylate.

[0016] The hard monomers (b) and the soft monomers (c) are divided according to the glass transition point of the homopolymer obtained from the monomer, and those having a glass transition point of 100 °C or higher are referred to as hard monomers, and those having a transition point of less than 100 °C are referred to as soft monomers (see "Polymer Handbook" published by Interscience Publishers (1966)).

[0017] According to the present invention, it is particularly preferable to use as the ethylenic unsaturated monomer, the above-mentioned hard monomer (b) and the soft monomer (c) in combination. It is believed that the use of the hard monomer improves the surface hardness, tensile strength and rigidity of the coat, and the use of the soft monomer provides flexibility, pliability and follow-up property of the coat.

[0018] In addition to that, an unsaturated monomer containing a hydroxyl group such as glycidyl (meth)acrylate, acrylic acid, methacrylic acid, 2-hydroxyethyl (meth)acrylate, 2-hydroxypropyl (meth)acrylate, 4-hydroxybutyl (meth)acrylate, mono(meth)acrylate of polyether glycol and an adduct of caprolactone or  $\beta$ -methyl- $\delta$ -valerolactone to these monomers can be used together with the above-mentioned monomers (b) and (c) as long as it is in a range that does not mar the effect of the present invention.

[0019] The acrylic copolymer according to the present invention is preferably obtainable by copolymerization of

(a) 1 - 90 % by weight, preferably 2 - 80 % by weight of 1,4-cyclohexane dimethanol monoacrylate or 1,4-cyclohexane dimethanol monomethacrylate,

(b) 5 - 94 % by weight, preferably 10 - 88 % by weight of the above-mentioned hard monomer, and

(c) 5 - 94 % by weight, preferably 10 - 88 % by weight of the above-mentioned soft monomer.

[0020] The polymerization process to be employed for the production of the acrylic copolymer according to the present invention can be any known process such as solution polymerization, bulk polymerization, emulsion polymerization and suspension polymerization. However, the solution polymerization process is preferably employed in order to obtain facilitated control of the polymerization reaction, good workability in producing the paint therefrom, and no immixture of impurities such as a dispersing agent or emulsifying agent. In the case of solution polymerization, the monomer components are copolymerized in the presence of an organic solvent and a polymerization initiator, and a chain transfer agent in some cases. The usable organic solvents are those which can be used for solution polymerization of unsaturated monomers. Examples thereof include isopropyl alcohol, n-butyl alcohol, methyl ethyl ketone, methyl isobutyl ketone, toluene, xylene, ethyl acetate, butyl acetate and the like.

[0021] Preferable polymerization initiators are those which can be dissolved in an unsaturated monomer, and examples include azobisisobutyronitrile, benzoyl peroxide, di-t-butyl peroxide, cumenhydroperoxide and the like. Examples of the chain transfer agent which can be used for controlling the molecular weight of the resulting copolymer include 2-mercapto ethanol, dodecyl mercaptan and the like.

[0022] The number average molecular weight of the acrylic copolymer according to the present invention must be in a range of from 1000 to 500,000. By number average molecular weight of the acrylic copolymer is meant the number average molecular weight obtained by measurement using GPC (gel permeation chromatography) followed by conversion based on a standard polystyrene. When the number average molecular weight is less than 1000, the resulting crosslinked coat shows poor durability and the number average molecular weight exceeding 500,000 is undesirable, since the viscosity becomes too high to worsen the workability.

[0023] The acrylic copolymer according to the present invention, having a hydroxy number in a range of from 2 to 250 KOH mg/g will provide a coat having excellent strength, abrasion resistance, chemical resistance and flexibility. The hydroxy number of the acrylic copolymer refers to the hydroxy number measured in conformity with JIS K 1557. When the hydroxy number is less than 2 KOH mg/g, the strength of the crosslinked coat is lowered. Also a hydroxy number exceeding 250 KOH mg/g is undesirable, since the flexibility of the crosslinked coat is decreased, and the available time is shortened.

[0024] The acrylic copolymer composition according to the present invention is obtained by blending the above-mentioned acrylic copolymer (A), as an essential component, and a crosslinking agent (B). The crosslinking agent

used is a compound selected from the group consisting of a polyisocyanate compound, amino resin, epoxy compound, silane compound and metal chelate.

**[0025]** Examples of the polyisocyanate compound include diisocyanates such as p-phenylene diisocyanate, naphthalene diisocyanate, tolylene diisocyanate, diphenyl methane diisocyanate, trimethylhexane diisocyanate, isophorone diisocyanate, xylylene diisocyanate, tetramethylxylylene diisocyanate, lysine diisocyanate, and a trimer thereof or a low molecular weight polyol adduct thereof.

**[0026]** Examples of amino resins include melamine, benzoguanamine, and urea and the like, examples of epoxy compounds include bisphenol A type epoxy resins and the like, examples of silane compounds include acetoxysilane, alkoxy silane, ketoxime silane, amino silane, aminoxy silane and the like. Examples of metal chelates include an alkoxide, acetyl acetonate, and acylate of Ti, Zr, Al and the like.

**[0027]** Among the above-mentioned crosslinking agents, polyisocyanate compounds are preferable from the view point of well balanced available time and crosslinking reactivity, abrasion resistance, chemical resistance as well as adhesive properties, and particularly preferable are aliphatic or alicyclic polyisocyanate compounds.

**[0028]** The amount of the above-mentioned crosslinking agent to be added to the acrylic copolymer can be appropriately selected according to the hydroxyl group contained in the acrylic copolymer, and the preferable amount is so selected that the reactive functional group (isocyanate group, epoxy group, amino group and acetoxysilane or alkoxy group in alkoxy silane) in the crosslinking agent becomes preferably 0.5 - 4 times (further preferably 0.8 - 2 times) that of the hydroxyl group (OH group) contained in the acrylic copolymer.

**[0029]** In order to accelerate the crosslinking reaction of the acrylic copolymer composition of the present invention during its use, a catalyst suited for each composition can be also added to the acrylic copolymer composition of the present invention. Examples of the usable catalyst include amines such as triethylene diamine and triethyl amine, and organic tin compounds such as dibutyl tin dilaurate when the crosslinking agent is a polyisocyanate compound; amines such as dimethylbenzylamine, and phenol when the crosslinking agent is an epoxy compound; and organic acids such as paratoluene sulphonic acid and organic tin compounds such as dibutyl tin diacetate when the crosslinking agent is a silane compound.

**[0030]** According to the acrylic copolymer composition of the present invention, the reactivity of the crosslinking reaction is not greatly lowered when the reaction proceeds. Accordingly, an ideally crosslinked body can be obtained under mild conditions and it can be used not only for paints but also for ink binders, coating agents for woven, non-woven fabrics, adhesives, sealers and potting compounds.

**[0031]** For applying the acrylic copolymer of the present invention to a paint, the acrylic copolymer (A) may be blended with a crosslinking agent (B) and if necessary another polymer is further blended to provide a polymer composition for the paint. The paint is coated on a various materials to provide a crosslinked coat film. When the acrylic copolymer is produced by solution polymerization, it is preferable that the copolymer is not separated from the organic solvent, but the crosslinking agent is added to the polymer solution, and it is coated on various materials, then the organic solvent is evaporated therefrom. As the crosslinking agent, products similar to those mentioned above can be used.

**[0032]** Other polymers which can be blended, if necessary, with the polymer composition containing the acrylic copolymer and the crosslinking agent are preferably polymers having compatibility with the acrylic copolymer. Illustrative examples include acrylic resins such as polymethyl methacrylate, styrene/alkyl acrylate copolymer, polyesters, polyurethanes, polyethers, polyamides, polycarbonate, polyvinyl chloride type resins, phenol resins, alkyd resins and the like. The amount of the other polymers mentioned above to be blended with the acrylic copolymer is preferably in a range of from 10:90 to 100:0 by weight ratio.

**[0033]** In order to form a crosslinked coat from the paint of the present invention, the paint is coated on a desired material, heated and then dried. The heating temperature and the heating time depend on the kind and the content of the acrylic copolymer, the kind and the blending amount of the crosslinking agent, the kind and the content of the solvent, the presence or absence, and the kind and amount of the crosslinking acceleration catalyst. However, it is preferable to select the temperature in the range of from 50 to 200 °C and the time in the range of from some seconds to some hours.

**[0034]** In this way, a crosslinked coat film with excellent strength, abrasion resistance, chemical resistance, heat resistance, weather resistance, hydrolysis resistance and flexibility can be obtained.

**[0035]** The present invention will be further illustrated with the following Examples.

**[0036]** In the following examples, parts refer to parts by weight. The details of the evaluation items and the evaluation methods on the raw materials and the products are given as follows.

(i) Hydroxy number

Measured in conformity with JIS K 1557.

(ii) Viscosity

E-type viscometer EHD-R type (manufactured by Tokyo Keiki Co., Ltd.) was used under such measuring conditions as temperature of 25 °C, sample amount of 1.5 ml; a standard rotor (1° 34') was used.

## (iii) Molecular weight

Used instrument: GPL apparatus HLC-8020 Type (manufactured by Tosoh Corporation)

Column used: G3000HXL, G4000HXL, G6000HXL

5 Measuring conditions: solvent: tetrahydrofuran, resin content of 0.2 % by weight, temperature: 40 °C

For measuring the molecular weight, a calibration curve was produced with a monodisperse standard polystyrene, then measurement was carried out in the same manner but by using the acrylic copolymer of the present invention and the measured value was converted to a standard polystyrene basis.

## 10 (iv) Pot life

An acrylic copolymer and a polyisocyanate compound in such amounts were mixed that the molar ratio between the hydroxyl group of the acrylic copolymer and the reactive functional group of the crosslinking agent became 1:1 and the resulting mixture was allowed to stand at 23 °C and the time required for the solution viscosity to become double the initial value was measured.

15 The following evaluation tests of (v) - (viii) were carried out on a coat film having a thickness of 100 µm, which was obtained by mixing a solution of the acrylic copolymer produced in Examples and Comparative Examples with a polyisocyanate compound as a crosslinking agent, in such amounts that the molar ratio between the hydroxyl group of the acrylic copolymer and the reactive functional group of the crosslinking agent became 1:1, followed by coating it on a releasing paper, heating and curing it at 80 °C for 24 hours.

## 20 (v) Pencil hardness

Measured in conformity with JIS K 5400

## (vi) Glass transition point

Measured by using differential scanning calorimeter (DSC 20 manufactured by Seiko Denshi Kogyo Co., Ltd.) at temperature rising rate of 20 °C/min.

## 25 (vii) Breaking strength, Breaking extension

Measured in conformity with JIS K 6301 by using Tension UTM-III-100 (manufactured by Orienteck Co., Ltd) under such conditions as temperature of 23 °C, relative humidity of 65 %.

## (viii) Solvent resistance

30 The surface of a coat film formed on a material being rubbed with cotton impregnated with methyl ethyl ketone under a determined amount of load, one reciprocating motion was counted as one rub, the surface condition after 10 rubs being observed visually eyes and the results are shown as follows.

\* : Absolutely no change was recognized.

○ : A flaw was found on the surface.

35 Δ : A part of the coat was found broken.

× : Peeling of the coat was found.

## I . Production of an acrylic copolymer and an acrylic copolymer composition, and evaluation

## 40 Example 1

45 **[0037]** Into a four neck flask having a stirrer, a thermometer, a reflux condenser and a dropping funnel were added 60 parts of toluene, 0.2 parts of dodecyl mercaptan, and 0.3 parts of azobisisobutyronitrile, mixture was stirred and mixed until it became homogeneous, and then the system was purged with nitrogen. Then, the internal temperature was raised to 70 °C, and a monomer mixture of 32.7 parts of methyl acrylate and 7.1 parts of cyclohexane dimethanol monoacrylate was added thereto dropwise. After completion of the dropping, reaction was carried out at 70 °C for 10 hours to give an acrylic copolymer solution. The resulting copolymer had a hydroxy number of 50.0 KOHmg/g, a viscosity of 300 mPa. sec, weight average molecular weight of 46900, and a number average molecular weight of 23000 (see Table 1).

50 **[0038]** This acrylic copolymer solution was evaluated by the above-mentioned evaluation methods and the results are shown in Table 2.

## Example 2

55 **[0039]** Into a four neck flask having a stirrer, a thermometer, a reflux condenser and a dropping funnel, were added 60 parts of toluene, 3 parts of dodecyl mercaptan, and 0.3 parts of azobisisobutyronitrile, the mixture was stirred and mixed until it became homogeneous, and then the system was purged with nitrogen. Then, the internal temperature was raised to 70 °C, and a monomer mixture of 21.0 parts of methyl acrylate and 16.0 parts of cyclohexane dimethanol

monoacrylate was added thereto dropwise. After completion of the dropping, reaction was carried out at 70 °C for 8 hours to give an acrylic copolymer solution.

[0040] The resulting copolymer had a hydroxy number of 112.7 KOHmg/g, a viscosity of 21 mPa. sec, a weight average molecular weight of 3200, and a number average molecular weight of 1500 (see Table 1).

[0041] This acrylic copolymer solution was evaluated by the above-mentioned evaluation methods and the results are shown in Table 2.

### Example 3

[0042] Into a four neck flask having a stirrer, a thermometer, a reflux condenser and a dropping funnel, were added 60 parts of toluene, 0.2 parts of azobisisobutyronitrile, the mixture was stirred, mixed until it became homogeneous, and then the system was purged with nitrogen. Then, the internal temperature was raised to 70 °C, and a monomer mixture of 34.3 parts of methyl acrylate, 3.6 parts of cyclohexane dimethanol monoacrylate, and 2.1 parts of 2-hydroxyethyl acrylate was added thereto dropwise. After completion of the dropping, reaction was carried out at 70 °C for 15 hours to give an acrylic copolymer solution. The resulting copolymer had a hydroxy number of 50.0 KOHmg/g, a viscosity of 1270 mPa. sec, a weight average molecular weight of 141500, and a number average molecular weight of 54300 (see Table 1).

[0043] This acrylic copolymer solution was evaluated by the above-mentioned evaluation methods and the results are shown in Table 2.

### Examples 4 - 7 and Comparative Examples 1 - 7

[0044] The process similar to that used in Example 1 was carried out except that the composition of the monomers was changed as shown in Table 1 to give an acrylic copolymer solution. The analytical data on the resulting copolymers are shown in Table 1, and the physical property evaluation results on the resulting acrylic copolymer solutions are shown in Table 2.

Table 1

Example

	1	2	3	4	5	6	7
<u>Composition of</u>							
<u>raw material (pbw):</u>							
Methylacrylate	32.7	21.0	34.1	11.8	—	—	—
Styrene	—	—	—	—	10.0	—	5.0
n-butyl methacrylate	—	—	—	—	22.7	22.7	22.7
Methyl methacrylate	—	—	—	—	—	10.0	5.0
Cyclohexane dimethanol							
monoacrylate	7.1	16.0	3.6	28.0	7.1	7.1	7.1
HEA*1	—	—	2.1	—	—	—	—
4HBA*2	—	—	—	—	—	—	—
HEMA-caprolacton adduct*3	—	—	—	—	—	—	—
Acrylate of PTMG*4	—	—	—	—	—	—	—
<u>Analytical value:</u>							
Hydroxy number(KOHmg/g)*5	50.0	112.7	50.0	197.2	50.0	50.0	50.0
Viscosity (mPa·sec)	300	21	1270	550	520	610	565
Weight-average molecular weight( $\times 10^4$ )	4.69	0.32	14.15	4.98	3.82	4.31	4.08
Number-average molecular weight ( $\times 10^4$ )	2.30	0.15	5.43	2.51	2.09	2.24	2.16
*1 2-hydroxyethyl acrylate							
*2 4-hydroxybutyl acrylate							
*3 PLACCEL FM-1 (Adduct of HEMA with 1 mole of caprolacton) produced by Daisel Chemical Ind.							
*4 Monoacrylate of polytetramethylene glycol(HW:200)							
*5 Conversion value based on solid copolymer							



Table 1 (continued)

		Comparative Example						
		1	2	3	4	5	6	7
<u>Composition of</u>								
<u>raw material (pbw):</u>								
Methyl acrylate		35.7	34.7	39.7	31.2	30.0	—	—
Stylene		—	—	—	—	—	10.0	10.0
n-butyl methacrylate		—	—	—	—	—	21.2	21.2
Methyl methacrylate		—	—	—	—	—	—	—
Cyclohexane dimethanol								
monoacrylate		—	—	0.1	—	—	—	—
HEA*1		4.1	—	—	—	—	—	—
4HBA*2		—	5.1	—	—	—	—	—
HEMA-caprolacton adduct *3		—	—	—	8.6	—	8.6	4.0
Acrylate of PTMG *4		—	—	—	—	9.6	—	—
<u>Analytical value:</u>								
Hydroxy number (KOHmg/g)*5		50.0	50.0	0.7	50.0	50.0	50.0	50.0
Viscosity (mPa·sec)		390	260	270	250	910	480	435
Weight-average molecular		4.24	4.10	3.90	4.08	9.28	4.05	4.10
weight ( $\times 10^4$ )								
Number-average molecular		2.21	2.23	2.11	2.10	3.65	2.01	2.11
*1 2-hydroxyethyl acrylate								
*2 4-hydroxybutyl acrylate								
*3 PLACCEL FM-1 (Adduct of HEMA with 1 mole of caprolacton) produced by								
Daisel Chemical Ind.								
*4 Monoacrylate of polytetramethylene glycol(MW:200)								
*5 Conversion value based on solid copolymer								

Table 2

Type of acrylic copolymer	Example							
	1	2	3	4	5	6	7	1
Type of crosslinking agent	HMDI*4	HMDI	HMDI	HMDI	HMDI	HMDI	HMDI	IPDI*5

\*4 "MITEC" NY730A (trimer of hexamethylene diisocyanate) produced by Mitsubishi Chemical Corp.

\*5 "MITEC" NY215A (Adduct of isophorone diisocyanate with trimethylol propane) produced by Mitsubishi Chemical Corp.

Table 2 (continued)

Type of acrylic copolymer	Example							
	1	2	3	4	5	6	7	1
Pot life(hr)	24	18	13	10	21	20	20	33
Pencil hardness	F	H	F	2H	2H	2H	2H	2H
Glass transition point(°C)	21	23	17	25	38	40	39	31
Breaking strength(MPa)	28.7	32.5	25.5	41.5	43.5	48.0	46.0	38.1
Breaking extention(%)	100	85	110	70	7	9	8	68
Solvent resistance	O	⊙	O	⊙	⊙	⊙	⊙	O
Type of acrylic copolymer	Comparative Example							
	1	2	3	4	5	6	7	
Type of crosslinking agent	HMDI *4	HMDI	HMDI	HMDI	HMDI	HMDI	HMDI	
Pot life(hr)	8	10	24	10	12	5	6	
Pencil hardness	F	B	HB	3B	6B	HB	HB	
Glass transition point(°C)	16	14	9	5	2	32	24	
Breaking strength (MPa)	18.2	16.7	10.5	9.5	7.9	15.0	16.6	
Breaking extention (%)	120	110	180	250	460	25	70	
Solvent resistance	X	Δ	X	X	X	X	X	

\*4 "MITEC" NY730A (trimer of hexamethylene diisocyanate) produced by Mitsubishi Chemical Corp.

## II. Preparation of a paint and evaluation

### (1) Preparation of a main agent for a white paint

[0045] The acrylic copolymer solution obtained in the above-mentioned Examples and Comparative Examples was added to a stainless beaker according to the following formulation, then stirred in an emulsifier for 30 minutes to give a main agent for a white paint.

Acrylic copolymer solution (solid content of 40 %)	105.0 parts
Titanium oxide (CR90) *1)	50.0 parts
Modaflow *2)	0.1 parts
Thinner *3)	50.0 parts
Solid content	205.1 parts

\*1): Rutile type titanium oxide produced by Ishihara Sangyo Kaisha, Ltd.

\*2): Acrylic surface conditioner produced by Monsanto Co., Ltd.

\*3): Xylene/cellosolve acetate = 80/20 mixed solution

### (2) Preparation of a white paint

[0046] To 205.1 parts of the above-mentioned main agent for a white paint were added 7.5 parts of MITEC NY730A (Trade Name) (HMDI trimer) or 11.6 parts of MITEC NY215A (Trade Name) (IPDI-trimethylol propane adduct) as a urethane curing agent, and about 25 parts of the above-mentioned thinner to prepare a white enamel paint for spray coating.

### (3) Formation of a test coat

[0047] The above-mentioned white enamel paint was coated in a thickness of about 25 μm by spray coating, on a soft steel plate having been subjected to zinc phosphate treatment. This was allowed to stand at room temperature for about 10 minutes, then baked at 100 °C for 30 minutes to form a white coat.

[0048] The results of the performance test of the coat are shown in Table 3.

[0049] The performance test of the coat shown in the table was carried out according to the following methods.

## EP 0 767 185 B1

### (i) Pencil hardness

**[0050]** Measured in conformity with JIS K 5400.

### (ii) Solvent resistance

**[0051]** The surface of a coat film formed on a material was rubbed with cotton impregnated with methyl ethyl ketone under a determined amount of load, one reciprocating motion being counted as one rub and the surface condition after 10 rubs was visually observed and the results are shown as follows.

- \*: Absolutely no change was recognized.
- O : A flaw was found on the surface.
- Δ : A part of the coat was found broken.
- X : Peeling of the coat was found.

### (iii) Stain resistance

**[0052]** Carbon black MA-100 (produced by Mitsubishi Chemical Co., Ltd.) as a staining material was applied to a piece of gauze and this was lightly rubbed on a coat film. The coat film was allowed to stand in a thermostatic chamber at 20 °C, under 75%RH for 24 hours, then washed with running water. The degree of stain visually observed was determined and the results are shown as follows.

- O : Good
- Δ : Little stain was left.
- X : Considerable stain was left.

### (iv) Scuff resistance

**[0053]** A mixed solution of cleanser and water (3:2) was used as an abrasion agent, and a color fastness abrasion tester (manufactured by Toyo Seiki Co., Ltd.) was employed. The abrasion agent was applied to a piece of flannel, and used to rub the test coat 20 times (reciprocating motion) under a load of 500 g. Then the coat film surface was washed with running water, dried naturally and the specular reflectivity of the coated surface at 20 degrees was measured.

**[0054]** The gloss retaining ratio was obtained according to the following equation, and the obtained value was used for evaluation of scuff resistance.

**[0055]** 20 degrees gloss retaining ratio =  $[20^\circ \text{ G value after the test} / 20^\circ \text{ G value before the test}] \times 100 (\%)$

- O : Retaining ratio was over 50%
- Δ : Retaining ratio was 20% or more and 50% or less.
- X : Retaining ratio was less than 20%.

### (v) Adherability: Evaluation by lattice pattern peel test

**[0056]** The coat film was striated with a cutter to provide a total of 100 squares in 1 cm<sup>2</sup>. And a cellophane adhesive tape was applied thereon, the tape was then peeled off, and the number of remaining squares x is shown in the form of x/100.

Table 3

Type of acrylic copolymer	Example							
	1	2	3	4	5	6	7	1
Type of crosslinking agent	HMDI *4	HMDI	HMDI	HMDI	HMDI	HMDI	HMDI	IPDI*5

\*4 \*MITEC\* NY730A (trimer of hexamethylene diisocyanate) produced by Mitsubishi Chemical Corp.

\*5 \*MITEC\* NY215A (Adduct of isophorone diisocyanate with trimethylol propane) produced by Mitsubishi Chemical Corp.

Table 3 (continued)

Type of acrylic copolymer	Example							
	1	2	3	4	5	6	7	1
Pencil hardness	H	2H	H	2H	3H	3H	3H	3H
Solvent resistance	○	⊙	○	⊙	⊙	⊙	⊙	○
Stain resistance	○	○	○	○	○	○	○	○
Scuff resistance	○	○	○	○	○	○	○	○
Adherability	100/100	100/100	100/100	100/100	100/100	100/100	100/100	100/100
Type of acrylic copolymer	Comparative Example							
	1	2	3	4	5	6	7	
Type of crosslinking agent	HMDI *4	HMDI	HMDI	HMDI	HMDI	HMDI	HMDI	
Pencil hardness	F	HB	F	2B	6B	B	B	
Solvent resistance	Δ	Δ	×	×	×	×	×	
Stain resistance	Δ	Δ	×	×	×	Δ	Δ	
Scuff resistance	Δ	Δ	×	×	Δ	Δ	Δ	
Adherability	100/100	100/100	80/100	100/100	100/100	100/100	100/100	

\*4 "MITEC" NY730A (trimer of hexamethylene diisocyanate) produced by Mitsubishi Chemical Corp.

[0057] As is clear from Table 1 - Table 3, the coat film obtained from the acrylic copolymer composition of the present invention shows high hardness, and excellent properties including heat resistance, breaking strength, flexibility, solvent resistance, scuff resistance and the like, while the coat film obtained from the resin composition of the Comparative Example shows low hardness, and poor properties including breaking strength, solvent resistance and scuff resistance.

#### Advantages


[0058] The present invention has the following particularly advantageous effects and its industrial merits are very large.

1. According to the acrylic copolymer of the present invention, the hydroxyl group introduced into the main chain shows high reactivity since it is bonded to a primary carbon, and has flexibility since it is positioned appropriately apart from the main chain, thus the reactivity is not drastically lowered even after the crosslinking reaction proceeds. Accordingly, an ideally crosslinked product can be obtained under mild conditions.
2. The paint of the present invention has a long pot life and can be used as a paint for various materials, giving a crosslinked coat which shows excellent abrasion for various materials resistance and chemical resistance and which at the same time has excellent flexibility.

#### Claims


1. An acrylic copolymer having a number average molecular weight of 1000 - 500,000, which comprises 1 - 90 % by

weight of a structural unit represented by the following general formula (I):

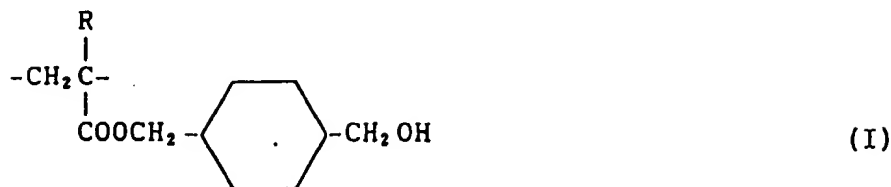

(wherein R represents a hydrogen atom or a methyl group) and 99 - 10 % by weight of a structural unit derived from an ethylenic unsaturated monomer, wherein the acrylic copolymer has a hydroxy number in the range of from 2 to 250 KOH mg/g, measured according to JIS K 1557.

- 15
2. An acrylic copolymer according to claim 1, wherein a hard monomer which is selected from the group consisting of methyl methacrylate, styrene, methyl styrene, p-vinyl toluene, acrylonitrile and acrylamide, and a soft monomer which is selected from the group consisting of alkyl acrylate (the number of carbon atoms in the alkyl is 1 - 21), alkyl methacrylate (the number of carbon atoms in the alkyl is 2 - 21), vinyl acetate and vinyl propionate are used together as said ethylenic unsaturated monomers.
- 20
3. An acrylic copolymer according to claim 2, wherein the acrylic copolymer is obtainable by copolymerization of
- (a) 1 - 90 % by weight of 1,4-cyclohexane dimethanol monoacrylate or 1,4-cyclohexane dimethanol mono-methacrylate,
- (b) 5 - 94 % by weight of said hard monomer, and
- (c) 5 - 94 % by weight of said soft monomer.
- 25
4. An acrylic copolymer composition in which an acrylic copolymer (A) which is an essential component and has a number average molecular weight of 1000 - 500,000, and comprises 1 - 90 % by weight of a structural unit represented by the following general formula (I):
- 30

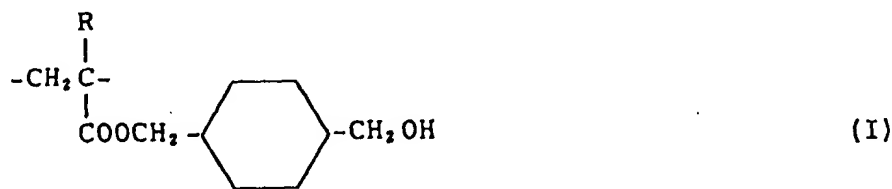


(wherein R represents a hydrogen atom or a methyl group) and 99 - 10 % by weight of a structural unit derived from an ethylenic unsaturated monomer, is blended with a crosslinking agent (B) which is selected from the group consisting of polyisocyanate compounds, amino resins, epoxy resins, silane compounds and metal chelates, wherein the acrylic copolymer has a hydroxy number in the range of from 2 to 250 KOH mg/g, measured according to JIS K 1557.

45

5. An acrylic copolymer composition according to claim 4, wherein a hard monomer which is selected from the group consisting of methyl methacrylate, styrene, methyl styrene, p-vinyl toluene, acrylonitrile and acrylamide, and a soft monomer which is selected from the group consisting of alkyl acrylate (the number of carbon atoms in the alkyl is 1 - 21), alkyl methacrylate (the number of carbon atoms in the alkyl is 2 - 21), vinyl acetate and vinyl propionate are used together as said ethylenic unsaturated monomers.
- 50
6. An acrylic copolymer according to claim 5, wherein said acrylic copolymer (A) is obtainable by copolymerization of
- (a) 1 - 90 % by weight of 1,4-cyclohexane dimethanol monoacrylate or 1,4-cyclohexane dimethanol mono-methacrylate,
- (b) 5 - 94 % by weight of said hard monomer, and
- (c) 5 - 94 % by weight of said soft monomer.
- 55

7. An acrylic copolymer composition according to claim 4, wherein said crosslinking agent (B) is a polyisocyanate compound.
8. An acrylic copolymer composition according to claim 4, wherein the acrylic copolymer (A) and the crosslinking agent (B) are so mixed that the reactive functional group in the crosslinking agent (B) is in a range between 0.5 and 4 against the hydroxyl group contained in the acrylic copolymer (A).
9. A paint composition in which an acrylic copolymer (A) which is an essential component and has a number average molecular weight of 1000 - 500,000, and comprises 1 - 90 % by weight of a structural unit represented by the following general formula (I):

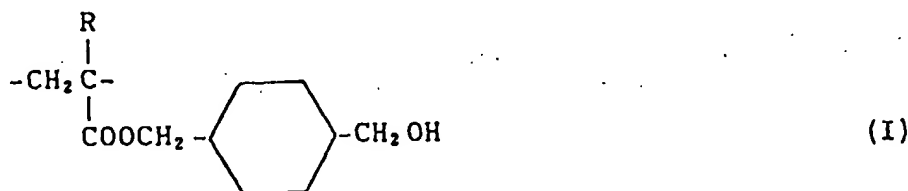


(wherein R represents a hydrogen atom or a methyl group) and 99 - 10 % by weight of a structural unit derived from an ethylenic unsaturated monomer, is blended with a crosslinking agent (B) which is selected from the group consisting of polyisocyanate compounds, amino resins, epoxy resins, silane compounds and metal chelates, wherein the acrylic copolymer has a hydroxy number in the range of from 2 to 250 KOH mg/g, measured according to JIS K 1557.

10. A paint according to claim 9, wherein a hard monomer which is selected from the group consisting of methyl methacrylate, styrene, methyl styrene, p-vinyl toluene, acrylonitrile and acrylamide, and a soft monomer which is selected from the group consisting of alkyl acrylate (the number of carbon atoms in the alkyl is 1 - 21), alkyl methacrylate (the number of carbon atoms in the alkyl is 2 - 21), vinyl acetate and vinyl propionate are used together as said ethylenic unsaturated monomers.
11. A paint according to claim 10, wherein said acrylic copolymer (A) is obtainable by copolymerization of
- (a) 1 - 90 % by weight of 1,4-cyclohexane dimethanol monoacrylate or 1,4-cyclohexane dimethanol monomethacrylate,
- (b) 5 - 94 % by weight of said hard monomer, and
- (c) 5 - 94 % by weight of said soft monomer.
12. A paint according to claim 9, wherein said crosslinking agent (B) is a polyisocyanate compound.

#### Patentansprüche

1. Acrylcopolymer mit einem Molekulargewicht-Zahlenmittel von 1.000 bis 500.000, umfassend 1 bis 90 Gew.% einer Struktureinheit, dargestellt durch die folgende allgemeine Formel (I):

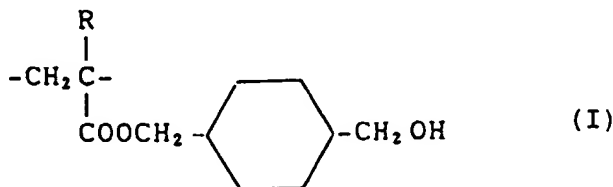

(worin R ein Wasserstoffatom oder eine Methylgruppe darstellt), und 99 bis 10 Gew.% einer Struktureinheit, die

von einem ethylenisch ungesättigten Monomer abgeleitet ist, worin das Acrylcopolymer eine Hydroxylzahl im Bereich von 2 bis 250 KOH mg/g aufweist, gemessen gemäß JIS K 1557.

2. Acrylcopolymer gemäß Anspruch 1, worin ein hartes Monomer, welches aus der Gruppe ausgewählt ist, die aus Methylmethacrylat, Styrol, Methylstyrol, p-Vinytoluol, Acrylnitril und Acrylamid besteht, und ein weiches Monomer, welches aus der Gruppe ausgewählt ist, die aus Alkylacrylat (die Anzahl der Kohlenstoffatome im Alkyl beträgt 1 bis 21), Alkylmethacrylat (die Anzahl der Kohlenstoffatome im Alkyl beträgt 2 bis 21), Vinylacetat und Vinylpropionat besteht, zusammen als die genannten ethylenisch ungesättigten Monomere verwendet werden.


3. Acrylcopolymer gemäß Anspruch 2, worin das Acrylcopolymer durch Copolymerisation von

(a) 1 bis 90 Gew.% von 1,4-Cyclohexandimethanol-monoacrylat oder von 1,4-Cyclohexandimethanol-mono-methacrylat,

(b) 5 bis 94 Gew.% des genannten harten Monomeren, und

(c) 5 bis 94 Gew.% des genannten weichen Monomeren, erhältlich ist.

4. Acrylcopolymerzusammensetzung, in welcher ein Acrylcopolymer (A), welches eine essentielle Komponente ist und ein Molekulargewicht-Zahlenmittel von 1.000 bis 500.000 hat, und 1 bis 90 Gew.% einer Struktureinheit, dargestellt durch die folgende allgemeine Formel (I):

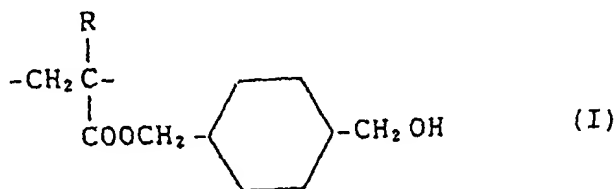

(worin R ein Wasserstoffatom oder eine Methylgruppe darstellt), und 99 bis 10 Gew.% einer Struktureinheit, die von einem ethylenisch ungesättigten Monomer abgeleitet ist, umfaßt, mit einem Vernetzungsmittel (B), welches aus der Gruppe ausgewählt ist, die aus Polyisocyanatverbindungen, Aminoharzen, Epoxyharzen, Silanverbindungen und Metallchelaten besteht, gemischt wird, worin das Acrylcopolymer eine Hydroxylzahl im Bereich von 2 bis 250 KOH mg/g aufweist, gemessen gemäß JIS K 1557.

5. Acrylcopolymerzusammensetzung gemäß Anspruch 4, worin ein hartes Monomer, welches aus der Gruppe ausgewählt ist, die aus Methylmethacrylat, Styrol, Methylstyrol, p-Vinytoluol, Acrylnitril und Acrylamid besteht, und ein weiches Monomer, welches aus der Gruppe ausgewählt ist, die aus Alkylacrylat (die Anzahl der Kohlenstoffatome im Alkyl beträgt 1 bis 21), Alkylmethacrylat (die Anzahl der Kohlenstoffatome im Alkyl beträgt 2 bis 21), Vinylacetat und Vinylpropionat besteht, zusammen als die genannten ethylenisch ungesättigten Monomere verwendet werden.

6. Acrylcopolymer gemäß Anspruch 5, worin das genannte Acrylcopolymer durch Copolymerisation von

(a) 1 bis 90 Gew.% von 1,4-Cyclohexandimethanol-monoacrylat oder von 1,4-Cyclohexandimethanol-mono-methacrylat,

(b) 5 bis 94 Gew.% des genannten harten Monomeren, und


(c) 5 bis 94 Gew.% des genannten weichen Monomeren, erhältlich ist.

7. Acrylcopolymerzusammensetzung gemäß Anspruch 4, worin das genannte Vernetzungsmittel (B) eine Polyisocyanatverbindung ist.

8. Acrylcopolymerzusammensetzung gemäß Anspruch 4, worin das Acrylcopolymer (A) und das Vernetzungsmittel (B) so gemischt sind, daß die reaktive funktionelle Gruppe in dem Vernetzungsmittel (B) in einem Bereich zwischen 0,5 und 4 gegenüber der Hydroxylgruppe, die in dem Acrylcopolymer (A) enthalten ist, liegt.

9. Anstrichzusammensetzung, in welcher ein Acrylcopolymer (A), welches eine essentielle Komponente ist und ein

Molekulargewicht-Zahlenmittel von 1.000 bis 500.000 hat, und 1 bis 90 Gew.% einer Struktureinheit, dargestellt durch die folgende allgemeine Formel (I):

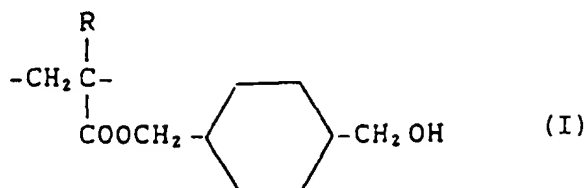

(worin R ein Wasserstoffatom oder eine Methylgruppe darstellt), und 99 bis 10 Gew.% einer Struktureinheit, die von einem ethylenisch ungesättigten Monomer abgeleitet ist, umfaßt, mit einem Vernetzungsmittel (B), welches aus der Gruppe ausgewählt ist, die aus Polyisocyanatverbindungen, Aminoharzen, Epoxyharzen, Silanverbindungen und Metallchelaten besteht, gemischt wird, worin das Acrylcopolymer eine Hydroxylzahl im Bereich von 2 bis 250 KOH mg/g aufweist, gemessen gemäß JIS K 1557.

10. Anstrich gemäß Anspruch 9, worin ein hartes Monomer, welches aus der Gruppe ausgewählt ist, die aus Methylmethacrylat, Styrol, Methylstyrol, p-Vinylnol, Acrylnitril und Acrylamid besteht, und ein weiches Monomer, welches aus der Gruppe ausgewählt ist, die aus Alkylacrylat (die Anzahl der Kohlenstoffatome im Alkyl beträgt 1 bis 21), Alkylmethacrylat (die Anzahl der Kohlenstoffatome im Alkyl beträgt 2 bis 21), Vinylacetat und Vinylpropionat besteht, zusammen als die genannten ethylenisch ungesättigten Monomere verwendet werden.

11. Anstrich gemäß Anspruch 10, worin das genannte Acrylcopolymer durch Copolymerisation von

(a) 1 bis 90 Gew.% von 1,4-Cyclohexandimethanol-monoacrylat oder von 1,4-Cyclohexandimethanol-mono-methacrylat,


(b) 5 bis 94 Gew.% des genannten harten Monomeren, und

(c) 5 bis 94 Gew.% des genannten weichen Monomeren, erhältlich ist.

12. Anstrich gemäß Anspruch 9, worin das genannte Vernetzungsmittel (B) eine Polyisocyanatverbindung ist.

## Revendications

1. Copolymère acrylique présentant un poids moléculaire moyen en nombre de 1 000 - 500 000, qui comporte de 1 à 90% en poids d'une unité structurale représentée par la formule générale (I) ci-dessous:

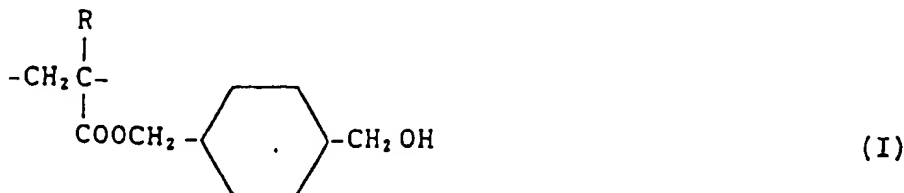

(dans laquelle R représente un atome d'hydrogène ou un groupe méthyle) et de 99 à 10% en poids d'une unité structurale dérivée d'un monomère éthyléniquement insaturé, le copolymère acrylique présentant un indice hydroxyle, mesuré conformément à JIS K 1557, dans la plage de 2 à 250 mg KOH/g.

2. Copolymère acrylique selon la revendication 1, dans lequel on utilise ensemble comme dits monomères éthyléniquement insaturés un monomère dur qui est choisi dans le groupe constitué du méthacrylate de méthyle, du styrène, du méthylstyrène, du p-vinylnolène, de l'acrylonitrile et de l'acrylamide, et un monomère malléable qui est choisi dans le groupe constitué des acrylates d'alkyle (le nombre d'atomes de carbone dans l'alkyle est de 1 à 21), des méthacrylates d'alkyle (le nombre des atomes de carbone dans l'alkyle est de 2 à 21), de l'acétate de




vinyle et du propionate de vinyle.

3. Copolymère acrylique selon la revendication 2, dans lequel le copolymère acrylique peut-être obtenu par copolymérisation de:

- (a) 1 à 90% en poids de monoacrylate de 1,4-diméthanolcyclohexane ou de monométhacrylate de 1,4-diméthanolcyclohexane,  
 (b) 5 à 94% en poids dudit monomère dur, et  
 (c) 5 à 94% en poids dudit monomère malléable.

4. Composition de copolymère acrylique dans laquelle un copolymère acrylique (A) qui est un composant essentiel, qui présente un poids moléculaire moyen en nombre de 1 000 à 500 000 et qui comporte de 1 à 90% en poids d'une unité structurale représentée par la formule générale (I) ci-dessous:

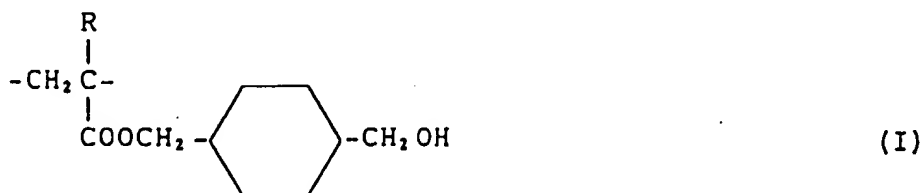

(dans laquelle R représente un atome d'hydrogène ou un groupe méthyle) et de 99 à 10% en poids d'une unité structurale dérivée d'un monomère éthyléniquement insaturé, est mélangé avec un agent de réticulation (B) qui est choisi dans le groupe constitué des composés de polyisocyanate, des résines amino, des résines époxy, des composés de silane et des chélates de métal, le copolymère acrylique présentant un indice hydroxyle, mesuré conformément à JIS K 1557, dans la plage de 2 à 250 mg KOH/g.

5. Composition de copolymère acrylique selon la revendication 4, dans laquelle on utilise ensemble comme dits monomères éthyléniquement insaturés un monomère dur qui est choisi dans le groupe constitué du méthacrylate de méthyle, du styrène, du méthylstyrène, du p-vinyltoluène, de l'acrylonitrile et de l'acrylamide, et un monomère malléable qui est choisi dans le groupe constitué des acrylates d'alkyle (le nombre d'atomes de carbone dans l'alkyle est de 1 à 21), des méthacrylates d'alkyle (le nombre des atomes de carbone dans l'alkyle est de 2 à 21), de l'acétate de vinyle et du propionate de vinyle.


6. Copolymère acrylique selon la revendication 5, dans lequel ledit copolymère acrylique (A) peut-être obtenu par copolymérisation de:

- (a) 1 à 90% en poids de monoacrylate de 1,4-diméthanolcyclohexane ou de monométhacrylate de 1,4-diméthanolcyclohexane,  
 (b) 5 à 94% en poids dudit monomère dur, et  
 (c) 5 à 94% en poids dudit monomère malléable.

7. Composition de copolymère acrylique selon la revendication 4, dans laquelle ledit agent de réticulation (B) est un composé de polyisocyanate.

8. Composition de copolymère acrylique selon la revendication 4, dans laquelle le copolymère acrylique (A) et l'agent de réticulation (B) sont mélangés de telle sorte que le groupe fonctionnel réactif dans l'agent de réticulation (B) est dans une plage comprise entre 0,5 et 4 par rapport au groupe hydroxyle contenu dans le copolymère acrylique (A).

9. Composition de peinture dans laquelle un copolymère acrylique (A) qui est un composant essentiel, qui présente un poids moléculaire moyen en nombre de 1 000 à 500 000 et qui comporte de 1 à 90% en poids d'une unité structurale représentée par la formule générale (I) ci-dessous:

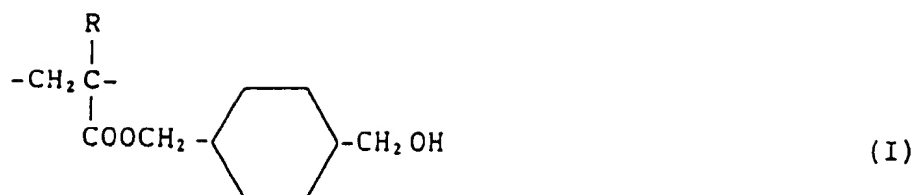

10 (dans laquelle R représente un atome d'hydrogène ou un groupe méthyle) et de 99 à 10% en poids d'une unité structurelle dérivée d'un monomère éthyléniquement insaturé, est mélangé avec un agent de réticulation (B) qui est choisi dans le groupe constitué des composés de polyisocyanate, des résines amino, des résines époxy, des composés de silane et des chélates de métal, le copolymère acrylique présentant un indice hydroxyle, mesuré conformément à JIS K 1557, dans la plage de 2 à 250 mg KOH/g.

10. Peinture selon la revendication 9, dans laquelle on utilise ensemble comme dits monomères éthyléniquement insaturés un monomère dur qui est choisi dans le groupe constitué du méthacrylate de méthyle, du styrène, du méthylstyrène, du p-vinyltoluène, de l'acrylonitrile et de l'acrylamide, et un monomère malléable qui est choisi dans le groupe constitué des acrylates d'alkyle (le nombre d'atomes de carbone dans l'alkyle est de 1 à 21), des méthacrylates d'alkyle (le nombre des atomes de carbone dans l'alkyle est de 2 à 21), de l'acétate de vinyle et du propionate de vinyle.

11. Peinture selon la revendication 10, dans laquelle ledit copolymère acrylique (A) peut-être obtenu par copolymérisation de:

- (a) 1 à 90% en poids de monoacrylate de 1,4-diméthanolcyclohexane ou de monométhacrylate de 1,4-diméthanolcyclohexane,
- (b) 5 à 94% en poids dudit monomère dur, et
- (c) 5 à 94% en poids dudit monomère malléable.

12. Peinture selon la revendication 9, dans laquelle ledit agent de réticulation (B) est un composé de polyisocyanate.